

# Evaluation of the Chemical Composition of Awgu Clay Deposit for its Industrial Potential

Azinta Cyprian Obinna <sup>a\*</sup> and Nevo Cornelius Ogochukwu <sup>a</sup>

<sup>a</sup> Department of Chemical Engineering, Enugu State University of Science and Technology, Enugu, Nigeria.

## Authors' contributions

This work was carried out in collaboration between both authors. Both authors read and approved the final manuscript.

## Article Information

### Editor(s):

(1) Dr. Madogni Vianou Irene, Universite d'Abomey-Calavi, Benin.

### Reviewers:

(1) Kulwant Singh Thind, Guru Nanak dev University, India.

(2) Herojit Singh Athokpam, Central Agricultural University, India.

(3) Asotah Wisdom, Federal University of Technology, Nigeria.

Complete Peer review History, details of the editor(s), Reviewers and additional Reviewers are available in this link: <https://www.sdiarticle5.com/review-history/77020>

Original Research Article

Received 11 September 2021

Accepted 21 November 2021

Published 23 November 2021

## ABSTRACT

The chemical composition of raw clay deposit in Awgu Town in Awgu Local Government Area of Enugu State, Nigeria was evaluated. The chemical property evaluation was done using x-ray fluorescence spectrometry, in addition to the determination of the loss on ignition test (L.O.I.) using standard technique. The result of the chemical evaluation revealed that Awgu clay was composed of silica (SiO<sub>2</sub>), 64.26%; alumina (Al<sub>2</sub>O<sub>3</sub>), 21.42%; iron oxide (Fe<sub>2</sub>O<sub>3</sub>), 12.54%; potassium oxide (K<sub>2</sub>O), 0.19%; titanium oxide (TiO<sub>2</sub>), 0.78% and other oxides in traces (<0.1%), and loss on ignition test (L.O.I.) of 5.17%. The results of the chemical evaluation propose that the clay deposit is classified as kaolinite and quartz, and possesses some industrial potentials.

**Keywords:** Awgu clay; kaolin; quartz; silica; x-ray fluorescence.

## 1. INTRODUCTION

Clay is in almost all inhabitable places on earth, and its easy availability and characteristic properties facilitate its diverse use in human civilization [1]. It is described as a natural, earthy, fine-grained material, mostly of a group of crystalline hydrous silicate minerals known as clay minerals – composed mainly of silica, alumina and water, but may also contain large enough quantities of iron, alkalis and alkaline earths [2]. Chemically and mineralogically, clay is a complex aluminosilicate compound composed of attached water molecules whose origin is due to the chemical and mechanical deterioration of rocks, such as granites [3]. According to the U.S. bureau of Mines as reported by [4], clays are generally classified into six groups, namely; kaolin, ball clay, fire clay, bentonite, fuller's earth, and common clay and shale clay.

[5] quoted [6] to have noted that the important property for clay classification is the basic composition and structure of clays. On the strength of this, clay minerals were classified into kaolinite group ( $Al_2Si_2O_{10}(OH)_6$ ) – containing a unit of silica and alumina each stacked in opposing fashion (1:1 lattice type). It is prominent to credit kaolin as the most valuable of the industrial clays as it is useful in many areas; paper filling and coating, paint, plastic, adhesives and ink pigment, rubber-reinforcing agent, ceramic raw materials for porcelain, dinner ware, tiles and enamels, catalyst for cosmetics base, and digestive coating remedy [7].

Ball clay has been described as a plastic and also white firing clay with applications in ceramic ware, primarily dinner ware, floor and wall tile, pottery and sanitary ware. Due to the ability of fire clays to withstand high temperatures ( $\geq 1500^\circ C$ ), they are used for refractoriness or to raise vitrification temperatures in heavy clay products [4]. Like kaolin clay, bentonite clays are hydrated aluminosilicates composed mainly of montmorillonite ( $Al_2O_3 \cdot 4SiO_2 \cdot H_2O$ ). The chemical and physical composition of bentonite make it an important industrial mineral with wide spread applications in foundry sands, iron ore pelletizing, insulator, drilling mud, bleaching clay, clarifying and decoloring, filtering agent, treating waste water, ingredient in cosmetics, animal feed and pharmaceuticals [7].

Common clay and shale also known as quartz is the most abundant and readily available clay material. It has high percentage of silicon oxide ( $SiO_2$ ), accounting for its name, silica sand. From an observatory point of view, quartz is the only clay material that posses the capacity to exist alone in pure state on account of its high content in most clays, but in many cases, may contain undesirable impurities. Silica sand is used in the production of various glass products which include, sheet glass, for windows, bottles, mirrors, optical instruments, chemical apparatus, electrical insulation and condensers, pipes, doors, crucibles, automobile and craft bodies, filters and building blocks [8].

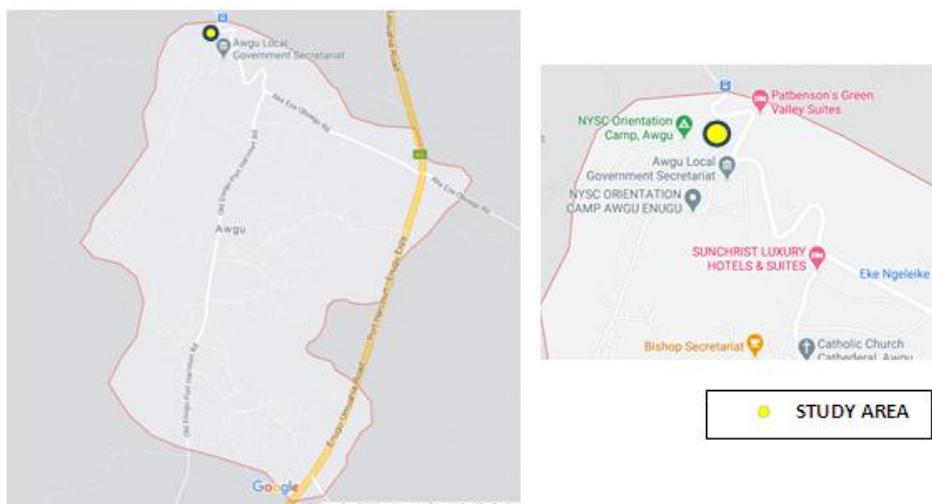


FIG. 1. Awgu map showing location of study area

Since the early part of 21<sup>st</sup> century, important uses have been found for clays in the rubber industry particularly those with less composition of silica [9]. The quantity/percentage and type of chemical oxides ( $\text{Fe}_2\text{O}_3$ ,  $\text{MgO}$ ,  $\text{CaO}$ ,  $\text{SiO}_2$ ,  $\text{Al}_2\text{O}_3$ ,  $\text{K}_2\text{O}$ ,  $\text{Na}_2\text{O}$ , etc) in clay ultimately determine the areas of applications of the clay such as in bricks, floor tiles, paper, ceramic, etc. [5] reported that clay products such as ceramic wares, burnt bricks and floor tiles, in Nigeria, are cheaper and more durable building materials than cement.

This study examined the chemical composition and loss on ignition (L.O.I.) of Awgu clay deposit in Awgu Local Government Area of Enugu State, Nigeria, in order to project its prominent versatility, and industrial and economic potentials. Furthermore, to the best of our knowledge, this study revealed that no document was found on the chemical composition of Awgu clay using x-ray fluorescence spectrometer.

## 2. METHODOLOGY

### 2.1 Sample Collection and Preparation

Field sampling exercise of the local clay sample has been done during the dry season. Fresh samples have been collected in lump form from pits dug to depths of 1.5m at a choice deposit of

the clay sample. The local clay has been got from Awgu region, Awgu local Government Area of Enugu State, Nigeria (Figure 1). The clay sample has been dried and grounded into powder form (about  $75\ \mu\text{m}$ ) with mortar and pestle while continuously sieving.

### 2.2 Chemical Analysis

The chemical evaluation of the clay has been determined using x-ray fluorescence (XRF). The chemical composition of the clay sample is presented in Table 1.

### 2.3 Loss on Ignition Test (L.O.I.)

[10] defined L.O.I. as the quantity of chemically combined water (and sometimes organic matter content) in inorganic materials. 50g of the clay sample has been dried in an oven at  $105^\circ\text{C}$  and cooled in a desiccator. The dried sample has been placed into a clean, dried empty crucible weighing ( $M_0$ ). The crucible together with the clay sample weighed ( $M_1$ ). The crucible containing the sample has been heated to a temperature of  $800^\circ\text{C}$  for 3 hours, cool to room temperature and then weighed ( $M_2$ ). The loss on ignition has been calculated from Equation 1:

$$\text{L. O. I.} = \frac{M_1 - M_0}{M_1 - M_2} \quad (1)$$

**Table 1. Chemical composition of Awgu clay compared with standard clay for industrial applications: [11] and [12]**

Oxide	Awgu clay	Ceramics	Refractory brick	High melting clay	Glass	Paper	Paint
$\text{Al}_2\text{O}_3$	21.42	26.50	25-44	16-29	12-17	33.5-45.8	37.9-38.4
$\text{SiO}_2$	64.26	60.50	51.70	53-73	80-95	45.0-45.8	45.3-47.9
$\text{K}_2\text{O}$	0.19	-	-	-	-	-	-
$\text{TiO}_2$	0.78	-	-	-	-	-	-
$\text{CaO}$	-	0.18-3	0.1-20	0.5-2.6	4-5	0.03-0.06	0.03-0.06
$\text{MnO}$	0.01	-	-	-	-	-	-
$\text{Fe}_2\text{O}_3$	12.45	0.5-1.2	0.5-2.4	1-9	2-3	0.3-0.6	13.4-13.7
$\text{SrO}$	0.01	-	-	-	-	-	-
$\text{Nb}_2\text{O}_5$	0.01	-	-	-	-	-	-
$\text{MoO}_3$	0.03	-	-	-	-	-	-
$\text{Ag}_2\text{O}$	0.01	-	-	-	-	-	-
LOI	5.17	8.18	8-18	5-14	-	-	-

### 3. RESULTS AND DISCUSSION

The results of the chemical evaluation and the loss on ignition of Awgu clay are presented in Table 1. The chemical results of Awgu clay show high silica ( $\text{SiO}_2$ ) content of which meets the standard for refractory bricks manufacturing, ceramics as well as high melting clay, although below the range for glass formulation. This high  $\text{SiO}_2$  value indicates that the clay sample is more of silica (quartz) which is typical of kaolinitic clay [13]. The alumina ( $\text{Al}_2\text{O}_3$ ) content of Awgu clay is 5.08% and 3.58% short of the standard required for ceramics and refractory bricks manufacturing respectively. Furthermore, the alumina content is short of the standard required for paper and paint manufacturing as reported by [12]. But it can be used in the manufacture of high melting clay and alumino silicate and fiber glasses as reported by [11]. The alumina content of the clay is a strong indicator for its refractoriness, as the higher the amount of alumina, the higher is the refractoriness of the clay. The iron oxide ( $\text{Fe}_2\text{O}_3$ ) content is higher than the standard for refractory bricks, high melting clay, glass and paper. Such level of iron oxide usually imparts reddish colouration to clay when fired, hence, making it very attractive as a ceramic raw material as reported by [3]. However, it is pertinent to note that high iron oxide content also affects the high temperature characteristics of clays, such as fired strength [5]. The loss on ignition of the Awgu clay is below the range for ceramic and refractory brick production as reported by [12], but within the range for high melting clay. However, [14] noted that loss on ignition values are okay to be low due to its effects on the porosity of the material especially refractory bricks.

### 4. CONCLUSION

The experimental investigation on the chemical composition of Awgu clay and its subsequent suitability as an industrial raw material show that Awgu clay contains silica ( $\text{SiO}_2$ ), aluminum oxide ( $\text{Al}_2\text{O}_3$ ), and iron oxide ( $\text{Fe}_2\text{O}_3$ ) as major components and is classified as kaolinite and quartz. The clay is therefore found to be a source of raw material for the production of refractory bricks, ceramics of highly attractive quality on account of its high iron oxide content, and high melting clay materials. It is recommended that future researchers should use other spectroscopic tools like X-ray diffraction in the determination of the mineralogical phases of Awgu clay and how it relates to its applications.

### COMPETING INTERESTS

Authors have declared that no competing interests exist.

### REFERENCES

1. Poulet F, John C, Bibring J, Murchie S.L. What do the clays tell? AGU fall Meeting. 2011;3.
2. Patterson S.H, Murray H.H. "Clays," industrial minerals and rocks, volume 1, society of mining engineers, New York; 1983.
3. Nnuka E.E, Agbo J.E. Evaluation of refractory characteristics of Kwa clay deposit in Plateau State, N.S.E. technical transaction. 2003;32-59.
4. Virta R.L. Annual report 1991: *Clays (Draft)*, Bureau Of Mines, U. S. Department Of The Interior, Washington, DC, September; 1992.
5. Abubakar U.A, Birnin Y, faruq U.Z, Noma S.S, Sharif N. Characterization of Dabagi clay deposit for its ceramics potential. African Journal of Environmental Science and Technology. 2014;8(8):455-459. DOI: 10.5897/AJEST2014.1741
6. [Velde B. Introduction to clay minerals chemistry, origins, uses and environmental significance. Chapman and Hall. London. 1992;12.
7. Raw Minerals Research and Development Council (RMRDC). Non-metallic mineral endowment in Nigeria. 12-17.
8. [Nwoye C.I., Mbah C.N. Effect of porosity on the shrinkage behavior of olokoro and Otamiri clay sinters. JMME, p 3.
9. Akudinobi BEB. Aspect of chemical and mineralogical Assessment of Ukpok clay, Nnewi South Local Government Area, Nigeria. Nig. J. Raw Mate. Res. 2006;3:56-67.
10. Mark U, Onyemaobi OO, Nwobodo CS, Uche R. Evaluation of some refractory characteristics of Ohiya and Uzuakoli clays. Inter. J. of Nat. and App. Sci. 2011;7(3):238-248.
11. Grimshaw RW. The chemistry and physics of clay and allied ceramics materials, 4<sup>th</sup> edition revised New York: Wiley in science, 1971; 15.
12. Chester JH. Refractoriness, production and properties, iron and steel institute, London, 1973;4
13. Azinta CO, Mbah GO, Omotioma M. Analysis of Effects of Foreign Clay and

Local Clay Additives on Viscosity of Water Based Drilling Mud. Journal of Engineering Research and Reports. 2021;21(4):60-67.  
DOI: 10.9734/jerr/2021/v21i417459

14. Omowumi OJ. Characterization of some nigerian clay as refractory materials for furnace lining. Nigerian Found of Engineering Management. 2000;1(1):1-4.

---

© 2021 Obinna and Ogochukwu; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

*Peer-review history:*

*The peer review history for this paper can be accessed here:*  
<https://www.sdiarticle5.com/review-history/77020>